


IS THE RF MONITORING & CONTROL SYSTEM OF THE FUTURE...AVAILABLE TODAY.

FEATURES & SPECIFICATIONS

- > Logs any changes with a location and time stamp
- > Works independently of the TV transmitter
- > Complements existing DAC monitoring systems
- > SNMP-enabled
- > Two I/O interfaces
- > Includes forward & reflected power monitoring as standard
- > Web-based SW interface and configuration
- > Email, SMS, APP alarm notifications triggered by user-defined parameters

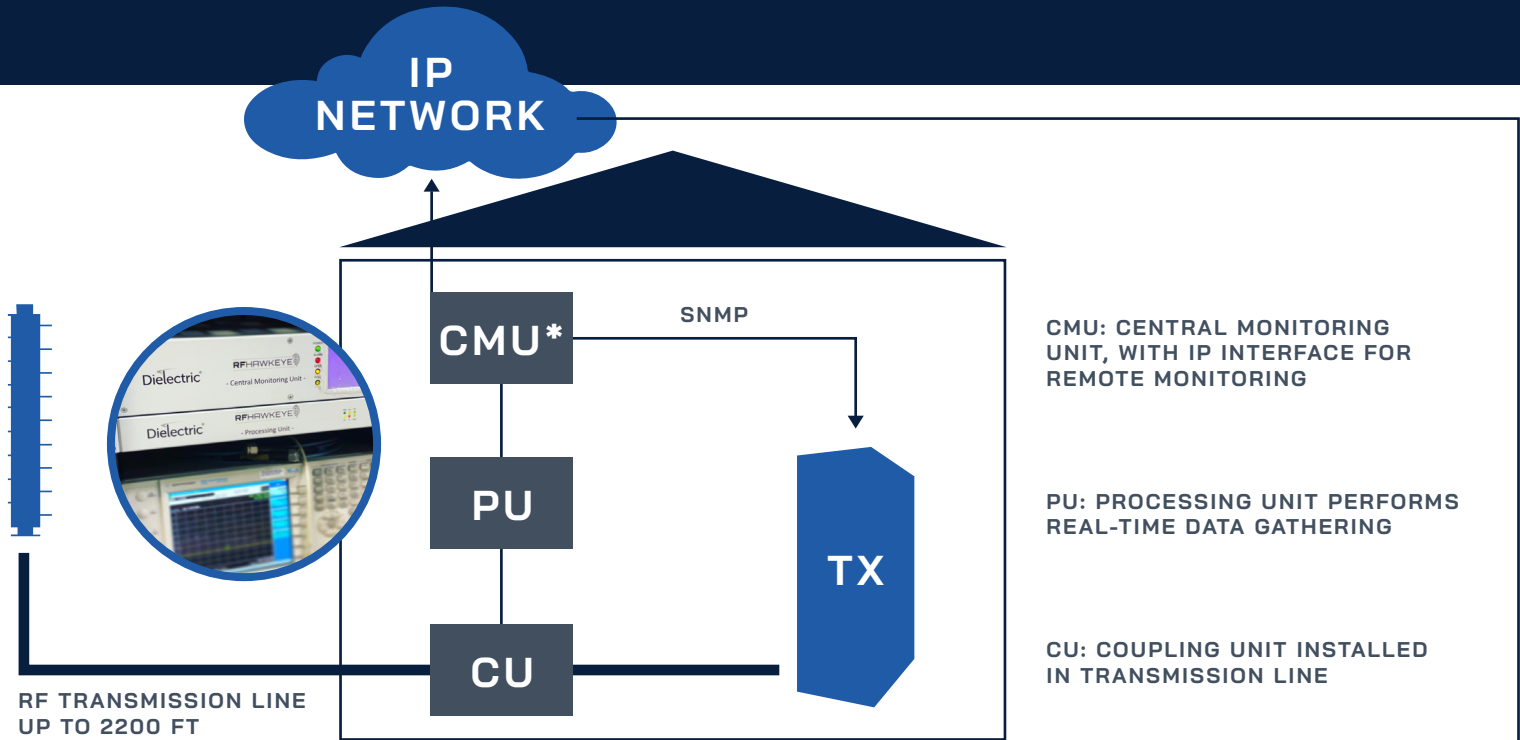

DACS ANALYTICS SAAS



OPERATOR



OPERATORS CAN USE THIS PROGRAM TO TRACK PERFORMANCE OF RF SYSTEMS ANY TIME, ANYWHERE IN THE WORLD.

*ADDITIONAL INPUTS TO THE CMU ARE AVAILABLE TO MONITOR, FOR EXAMPLE, FORWARD AND REFLECTED POWER, BUILDING ALARMS AND TEMPERATURE ALARMS.

RFHAWKEYE®

Return Loss Sensitivity	> 1 dB
Detectable Return Loss	< -45 dB
Accuracy of Anomaly Location	± 8 in / 200 mm
Out-of-band Emission	< - 110 dBc ; per FCC §73.622 (h)
Arc Detection	> 100 µs
Maximum Distance from PU to CU	21 ft / 7 m
Frequency Range	470 - 700 MHz

CENTRAL MONITORING UNIT (CMU)

Display	5 in Touch Screen
Network Input	Ethernet (LAN) or Mobile Data
Communication Protocol	SNMP
Number of RF Inputs 50-860 MHz	Option 42 4 or 2 pairs for VSWR / Return Loss Option 41 6 or 3 pairs for VSWR / Return Loss Option 40 8 or 4 pairs for VSWR / Return Loss
RF Input Connector	SMA Female, 50-860 MHz
Number of Sensor & Temperature Inputs	Option 42 2 Sensors or 4 Temperature Detectors Option 41 1 Sensor or 2 Temperature Detectors Option 40 None
Sensor Connector	Proprietary
Power Supply	90-264 V AC, 47-63 Hz - IEC/ 16W
Weight	10.4 lbs / 4.7 kg
Dimensions	2 RU / H 3.5 x W 19 x D 8.6 in / H 89 x W 482 x D 218 mm

PROCESSING UNIT (PU)

RF Connector	2 x N - Female / 50 ohm
Safety	EN60950-1
LAN Interface	RJ-45 / Ethernet / IP Interface
Power Supply (Redundant)	2 x 90-264V AC, 47-63 Hz - IEC/ 30W
Dimension	1 RU / H 1.75 x W 19 x D 8.6 in / H 45 x W 482 x D 218 mm
Weight	5.95 lbs / 2.7 kg
Environmental Temperature	32–113° F / 0–45° C

COUPLER UNIT (CU)

RF Connector	2 X N - Female / 50 ohm		
Power Rating	Same as Equivalent Rigid Line		
Return Loss / VSWR	> 35 dB / < 1.036:1		
Material	Rigid Line: Copper; Flange: Brass		
Environmental Temperature	32–113° F / 0–45° C		
Dimensions	3 1/8" - 50 ohm*	15.75" - 400 mm	9.5 lbs / 4.3 kg
	4 1/16" - 50 ohm*	15.75" - 400 mm	14.0 lbs / 6.4 kg
	6 1/8" - 50 ohm*	15.75" - 400 mm	27.0 lbs / 12.2 kg
	6 1/8" - 75 ohm*	15.75" - 400 mm	26.0 lbs / 11.8 kg
	7 3/16" - 75 ohm*	15.75" - 400 mm	32.0 lbs / 14.5 kg
	8 3/16" - 75 ohm*	15.75" - 400 mm	32.0 lbs / 14.5 kg

Dielectric.com

Raymond & Lewiston, Maine
(800) 341-9678

